

**JVC<sup>®</sup>**  
**PROFESSIONAL**

21" (20"V) COLOR VIDEO MONITOR  
**TM-A210G**

---

The Flexible Big-Screen Solution with  
Y/C Input and On-Screen Menu



- 21-inch Full-Square CRT with Vertical Stripe Phosphor
- NTSC and PAL Compatibility
- White Balance Adjustment
- Set Up Memory
- Control Panel Lock-Out
- More than 450 TV Lines Horizontal Resolution
- Selectable Remote System Control
  - 4:3 and 16:9 Aspect Ratios Selectable
  - Input Select

# Automatic Voltage Selection for Worldwide Application — The TM-A210G Color CCTV Monitor Delivers Exceptional Performance in a Robust and Cost-Effective Manner

JVC engineered the 21-inch Full-Square TM-A210G color monitor to deliver great pictures and to provide exceptional versatility in CCTV applications. Built to give long life and housed in a tough metal cabinet, the TM-A210G features an easy-to-use, on-screen menu for varied parameter settings. Additional features are wired remote control and audio input. Flexibility is further enhanced by an auto-voltage control system, which accepts 120V and 220 – 240V AC voltage supplies for use worldwide. Compact for easy installation, the TM-A210G is a powerful CCTV solution, featuring high performance and value in an elegant package.



Front Panel



Rear Panel




## Specifications

Type	Color video monitor
Color system	NTSC and PAL
CRT	21" (20"V) in-line guns, dot pitch of 0.63 mm
Scanning frequency	NTSC H: 15.75 kHz V: 60 Hz PAL H: 15.625 kHz V: 50 Hz
Horizontal resolution	More than 450 TV lines
Power requirement	120V and 220V – 240V, 50Hz/60Hz
Power consumption	1.3 A
Color temperature	6,500°K/9,300°K (selectable)
Input terminals	
1) Input A	Composite Video 1.0 V (p-p), 75 ohms, negative sync., BNC x 2, with auto termination for loop through
2) Input B	Composite Video 1.0 V (p-p), 75 ohms, negative sync., auto termination, BNC x 2, with auto termination for loop through
Y/C	Y: 1.0 V (p-p), 75 ohms, negative sync. C: 0.286 V (p-p), 75 ohms DIN 4-pin x 2, with auto termination for loop through
Audio terminals	RCA pin x 4 connectors for input A and input B, each with loop through
Audio output	1W (8 cm round x 1)
Remote terminal	RCA pin x 2 connectors
Weight	63 lbs. (28.1Kg)

## Dimensions

Unit: inches (mm)

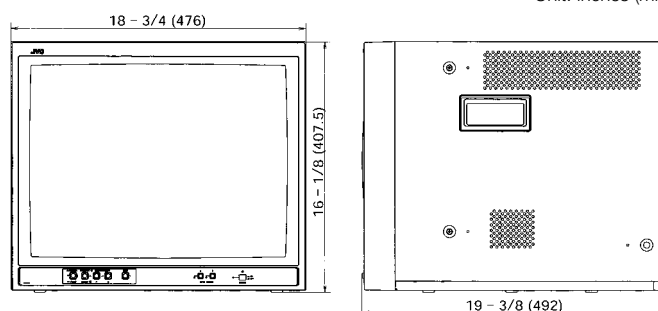

*Design and specifications subject to change without notice.*

# JVC®

DISTRIBUTED BY

JVC PROFESSIONAL PRODUCTS COMPANY  
DIVISION OF JVC AMERICAS CORP.  
1700 Valley Road, Wayne, N.J. 07470  
TEL: (973) 317-5000, (800) 582-5825  
FAX: (973) 317-5030  
Internet Web Site <http://www.jvc.com/pro>  
E-mail: [proinfo@jvc.com](mailto:proinfo@jvc.com)

JVC CANADA INC.  
21 Finchdene Square, Scarborough, Ontario M1X 1A7  
TEL: (416) 293-1311 FAX: (416) 293-8208  
Internet Web Site <http://www.jvcpro.com/>

Printed in Japan  
ICN-0273